

LIMITED LIFETIME WARRANTY:

U.S. Rubber Recycling Inc.'s QuietSound II™ is guaranteed to be free of manufacturing defects in material and workmanship for 20 years from the original date of purchase, by the original purchaser ("Warranty Period"). This warranty is not transferable. If there are defects in material and workmanship during the Warranty Period U.S. Rubber Recycling Inc. will replace or repair the product at its discretion.

U.S. Rubber Recycling, Inc. shall not be liable for any damage, loss or claim whatsoever unless the material is installed according to the written detailed installation instructions provided by us and as published on our website at USRUBBER.COM and used only as intended by U.S. Rubber Recycling Inc.


THIS LIMITED WARRANTY DOES NOT COVER DISSATISFACTION OR PROBLEMS OR OTHER DAMAGE TO THE MATERIALS AS DESCRIBED IN THE COMPLETE MANUFACTURER WARRANTY STATEMENT. FOR A COPY OF THE COMPLETE MANUFACTURER WARRANTY, OBTAIN THE COMPLETE INSTALLATION INSTRUCTIONS AT USRUBBER.COM.

The warranty is limited to the repair or replacement of products, as more particularly described in the Complete Manufacturer Warranty, which are shown to be defective during the Warranty Period. The owner/end-user agrees not to advance any claim for any other measure of damage or loss, and U.S. Rubber Recycling Inc. shall not be liable for installation, disassembly, removal, disposal, return shipping, or other similar costs.

THERE ARE NO WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, NOR ANY OTHER WARRANTIES OTHER THAN HEREIN STATED, NOR SHALL USRUBBER BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.

NO AGENT OR REPRESENTATIVE OF U.S. RUBBER PRODUCTS, INC. HAS ANY EXPRESS OR IMPLIED AUTHORITY TO MAKE ANY REPRESENTATION, PROMISE OR GUARANTEE NOT STATED HEREIN.

THIS LIMITED WARRANTY IS FURTHER SUBJECT TO THE CONDITIONS, LIMITATIONS, AND EXCLUSIONS PROVIDED ON THE COMPLETE MANUFACTURER WARRANTY STATEMENT. FOR A COPY OF THE COMPLETE MANUFACTURER WARRANTY, OBTAIN THE COMPLETE INSTALLATION INSTRUCTIONS AT USRUBBER.COM.

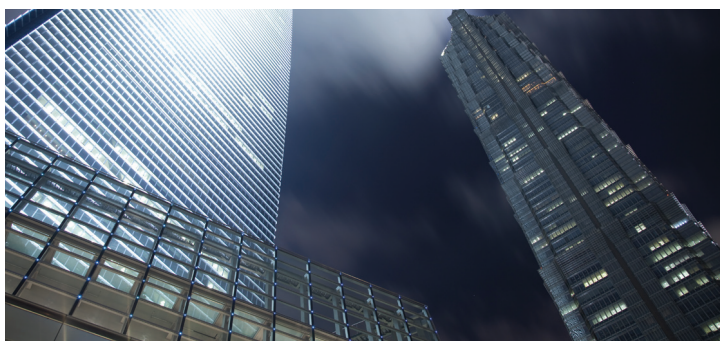

1231 South Lincoln Street, Colton, CA 92324
Tel. 888.473.8453 • 909.825.1200 • Fax 909.825.1288
www.usrubber.com

QuietSound II™ Rolled Underlayment Specifications

9MM QUIETSOUND II

Item	Test	Standard	Rating
Impact Insulation Class* 6" Concrete	IIC	ASTM E492 ASTM E989	54
Impact Insulation Class 6"concrete/6" fiberglass	IIC	ASTM E492	58
Water Vapor Transmission Rate(WVTR)	Inverted Water g/m2/24HR	ASTM E96	4.7
Density	Per cubic foot (pounds)	ASTM D3676 Section 12	45
Compression Resistance	@ 25% (cubic foot density)	ASTM D3575 ASTM D3676	65
Compression set	@25%	ASTM D395 78° for 22 hr/then release 24 hr	10.1%
Coefficient of friction	Instron Universal Tester	ASTM 1894	0.84 wet 0.90 dry
Durometer	Shore A	ASTM D-2240	40 ±5
Tensile Strength	"Die C"	ASTM 412	1.90 Mpa 275 PSI
Flammability	Pill Test (Methanamine)	DOC-FF 1-70	Passed
Volatile Organic** Compounds (VOCs)	Closed Chamber 1.0m ±.05 m/3	ASTM D5116 ASTM D6196	SCAQMD 1168-passed

*Test profile: ½" engineered wood over 9mm Quiet Sound II™, over 6" concrete=54IIC.

**Test results by Air Quality Sciences available.

Environmentally Efficient — Remove Waste Tires From Our Landfills — LEED Points Qualification

QuietSound II™ is made from recycled tires which would have otherwise filled our already-full landfills and the Green Building Movement is an important and effective selling point. Using QuietSound II™ not only contributes to energy conservation, it qualifies for LEED (Leadership in Energy and Environmental design) points under Green Building Council Certifications.

Ease of Installation

Installation problems and installer error are minimized with QuietSound II™. Installation of QuietSound II™ is simple, fast, and cost-efficient when compared with comparable products which often require extensive site preparation and man hours. And, QuietSound II™ is adhered with a similarly low VOC adhesive (AcryliBond II) which provides for ease of troweling, quick-tack, and flexible shear strength.

Think green. U.S. Rubber Recycling, Inc. a worldwide manufacturer/supplier of high quality flooring products made primarily from recycled rubber and other environmentally friendly compounds that are designed specifically for high traffic or high abuse areas in all types of retail and commercial buildings. We will, at all times, strive to maintain the high standards set forth in the "Total Quality Management" or "TQM" philosophy. The ultimate end goal is the preservation of the world's natural resources through creative engineering.